

Delford SP6000
Stretch Wrapper

SP6000



www.aewdelford.com



High quality tray wrapping


The AEW Delford Systems **SP6000** stretch film tray overwrapper combines high speed throughput with maximum flexibility.

At speeds up to 90 packs/min, the **SP6000** can handle a wide variety of trays and punnets for packaging meat, poultry and fresh produce, ensuring a sealed pack with minimum film usage.


The **SP6000** is microprocessor-controlled to offer 50 programmable memories, giving quick tray changes via a simple-to-use tactile keyboard. A servo-driven system provides automatic adjustment of the film length and knife position, plus running speed - minimising changeover time and film wastage.

The **SP6000's** unique design for film tensioning and pressure-assisted film heat sealing facilitates its use with other film types, such as PE-based non-PVC.

Constructed with extensive use of stainless steel and designed for ease of access, the **SP6000** is hygienic and simple to clean, and is suitable for the most arduous environments.

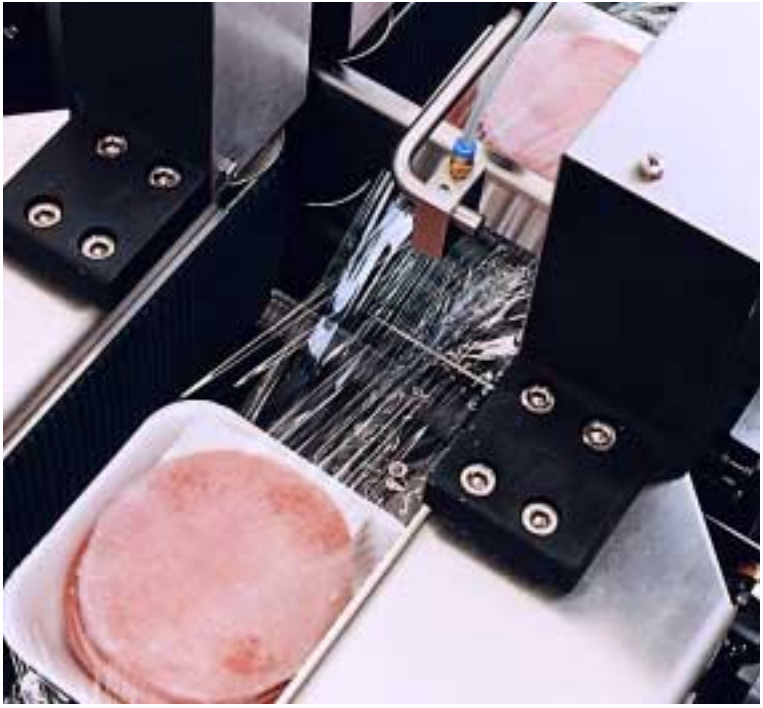

The serrated-blade guillotine requires minimum maintenance and no adjustment for tray width and has a photo optic fitted for protection of the knife blade.

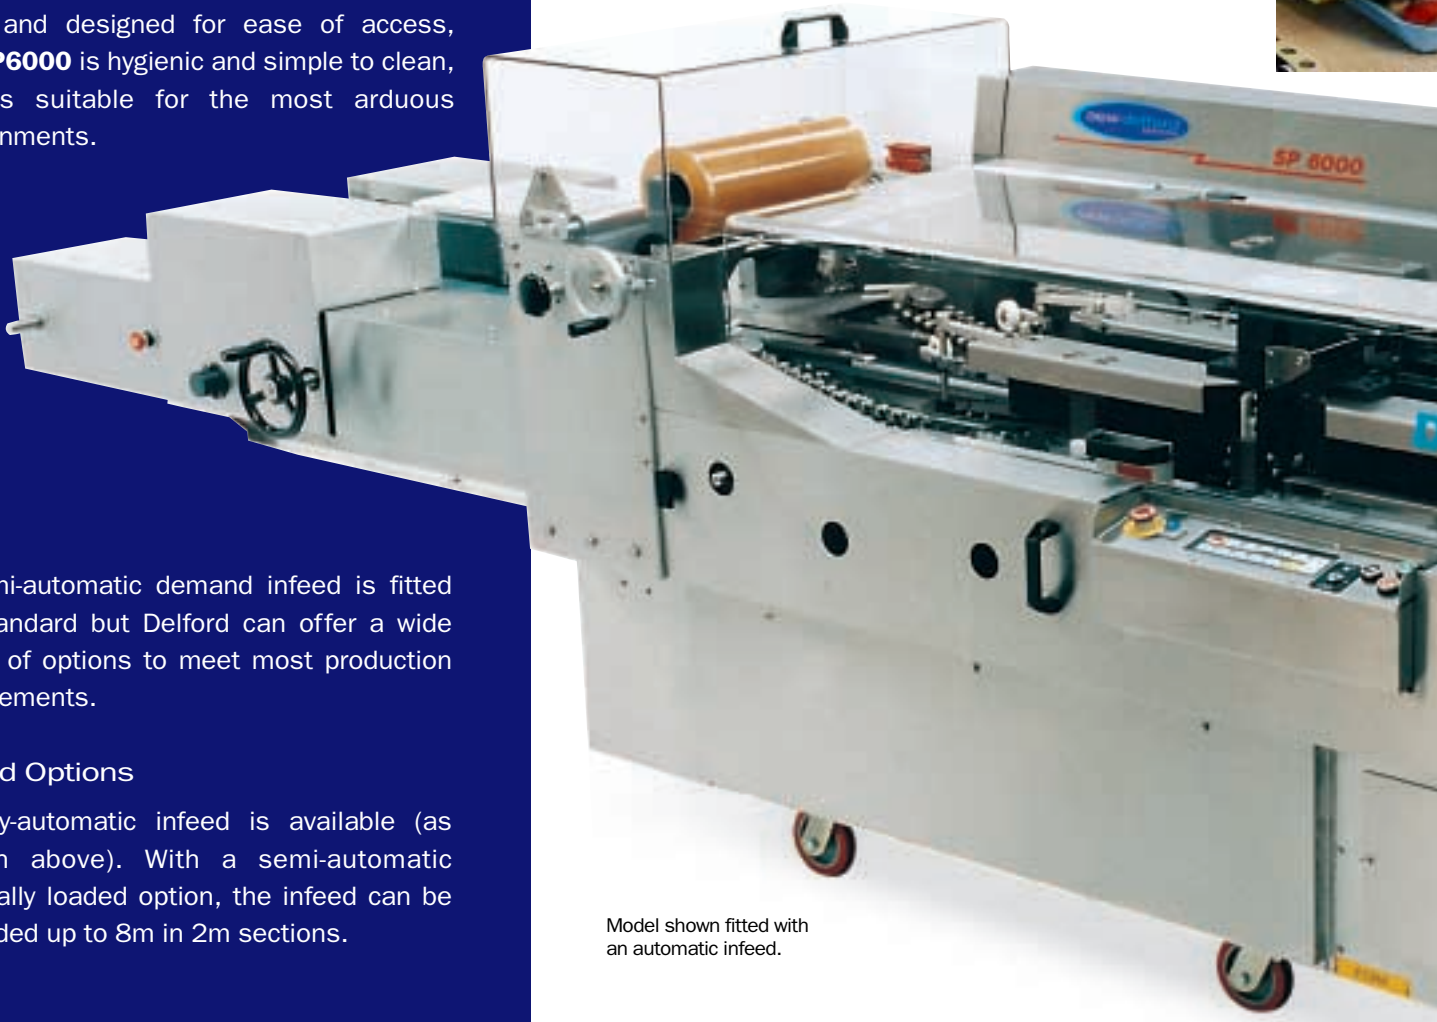

Model shown fitted with an automatic infeed.

A semi-automatic demand infeed is fitted as standard but Delford can offer a wide range of options to meet most production requirements.

Infeed Options

A fully-automatic infeed is available (as shown above). With a semi-automatic manually loaded option, the infeed can be extended up to 8m in 2m sections.

with speed and flexibility

aew delford
systems




The unique film grip system ensures a consistent well stretched pack with efficient film usage.



Provided as standard, the driven overhead pressure roller operates in conjunction with a variable speed control on the heater belt to ensure a secure base weld.


User-friendly plasma screen display provides memory recall and full running information.

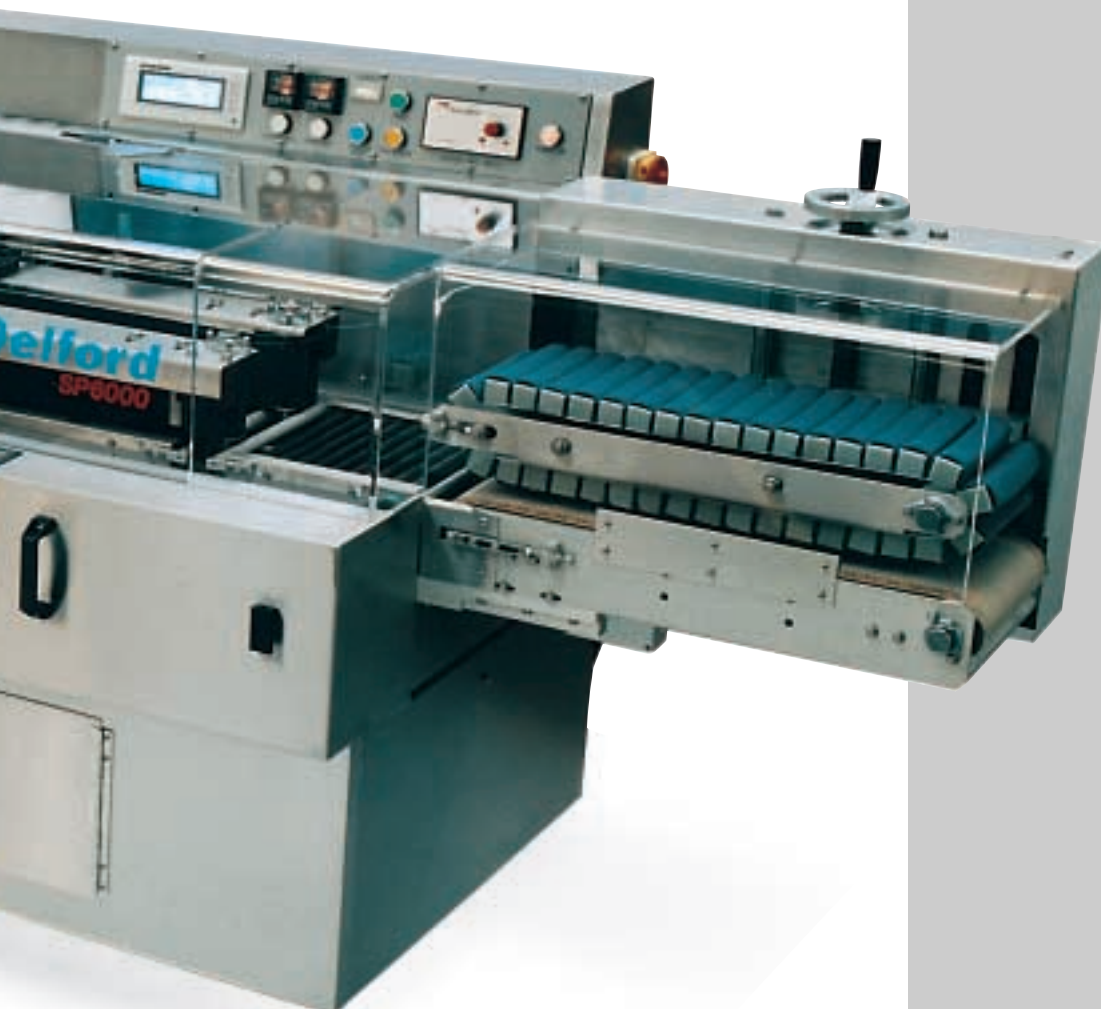

Features and Benefits

- Stainless steel construction.
- 50 product memories for quick changeovers.
- Simple to use keyboard.
- High quality transparent covers.
- Variable speeds, up to 90 packs/min with 100mm knife height, up to 65 packs/min with 140mm knife height.
- Semi-automatic demand infeed.
- Optional infeeds of up to 8 meters. (subject to pack weight).
- Fully automatic infeed option.
- Servo control on film length, knife settings and speed by pre-programmable recall.
- Plasma screen display provides full running information.
- Fully-adjustable driven pressure roller over heater belt ensures virtually leakproof pack base seals.
- Queue conveyor element prior to heater belt avoids heat distortion during stoppages.
- All drives are shaft or toothed belt.
- Easy access for cleaning.
- Optional printed film facility.


Delford SP6000 Stretch Wrapper

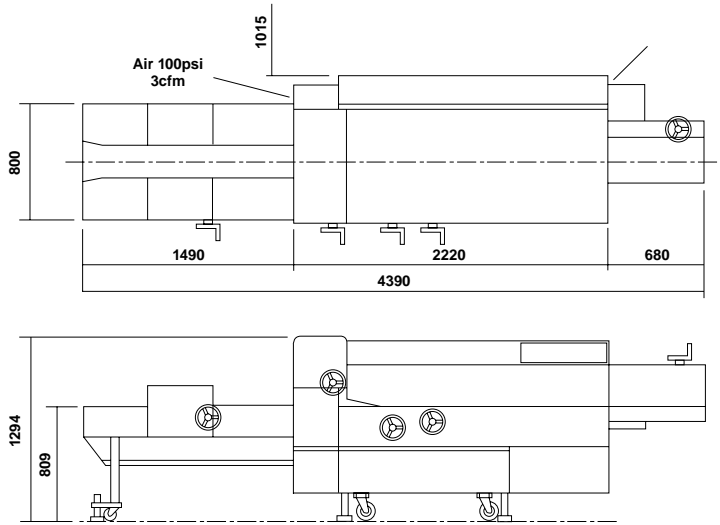

Model shown fitted with an automatic infeed

Pack Sizes

(mm)	length	width	height
Minimum	130	80	20
Maximum	320	240	130



Agent/Distributor

Technical Information

Power requirement: 380/440V 50Hz 3 phase plus neutral, start up 12 amp, running 5 amp.

Knife height: 140mm maximum.

Infeed: guarded with interlocking safety switching.

Shipping weight: 1050kg.

Overall length: 4065mm (when fitted with semi-automatic infeed).

All AEW Delford Systems machines carry CE certification.

Integrated Systems

The **SP6000 Stretch Wrapper** can operate as a stand alone machine or it can be integrated with a range of manual or automatic production lines.

For further information please logon to:

www.aewdelford.com